

Free Go Screen Monitor

Product No.	FG220	
Screen	22 inches	
Product Name	22 inches Free Go Screen	
Product Image		
LCD Panel Parameters	LCD maker	LG/BOE/CSOT/AUO
	Display Area	476.64(W)×268.11(H) mm
	Aspect Ratio	16:9
	Brightness	250 nits typical
	Contrast	1000: 1
	Colors	8bits-true (16.7M)
	Backlight Type	LED backlight
	Viewing Angle	178°(V)/178°(H)
	Physical Resolution	1920*1080
	Lifetime	50000(hrs)
Mainboard	Solution	Monitor
	Languages	English, French, Germany, Italian, Spanish etc.
	VGA	DOS、VGA、SVGA、XGA、SXGA、WXGA+、WSXGA+、WUXGA
	HDMI	480i、480p、576i、576p、720p、1080i、1080P
	Menu	Support 90° rotation
	Video	support .wmv、.avi、.flv、.rm、.rmvb、.mpeg、.ts、.mp4、etc.
	Image	support .BMP、.JPEG、.PNG、.GIF、etc.
	Auto Sleep	No input signal, auto sleep
	Mouse/Keyboard	n/a
	3rd Party Applications	n/a
Screen Specs	Socket	HDMI*1, Earphone*1,USB2.0*1, VGA*1, DC 12V output*1 (power supply for customers' own media player), Touch output*1(only when built with touchscreen)
	Buttons	Home*1, Power*1
	Speaker	2*5W high quality speakers
	Power Consumption	≤35W
	Standby Consumption	≤0.5W
	Power Adapter	100-240V 50/60Hz,output DC 24V5A
	Unit Dimension	500(W)*280(H)*38(T)mm
	Package Dimension	1250(W)*500(H)*340(T)mm (including the stands)
	Net Weight	3Kg
	Gross Weight	5Kg
	Working Environment	Temperature:0℃-50℃, Humidity:10%RH-80%RH
	Storage Environment	Temperature:-20℃-60℃, Humidity:10%RH-90%RH
Stands	Adjust Height	n/a
	Rotation Angle	90° clockwise/90° counterclockwise
	Tilt Angle	22° up/22° down
	Wheels	5pcs of 1 inch universal wheel
	Net Weight of Pole	2.3Kg
	Gross Weight of Pole	4.5Kg
	Pole Package	1050*284*154mm
	Net Weight of Base	8.45Kg

	Gross Weight of Base	9.85Kg
	Base Package	400*129*400mm
	LED Indicator	Blue/Red LED, Flashing blue when charging, Solid blue when charging complete, Solid red when half capacity, Flashing red when need to charging.
Battery	Type	Lithium Iron Phosphate Battery
	Capacity	230Wh for 6 hours working
	Voltage	19.2V
	Charging Socket	DC 2.5mm
	Max Current	5A
	Dimension	220mm*170*30mm (Max)
	Weight	2.5Kg
Touchscreen (optional)	Touch Technology	G+G PCAP capacitive touch
	Touch Points	Up to 10 points
	Touch Channel	95 channels
	Scan Frequency	≥100KHz
	Touch Accuracy	±2.0mm
	Touch Sensitivity	Click ≤Φ 6mm, Slip≤Φ 6mm, Uniformly≤1.5mm
	Working Voltage	DC 5V
	Communication	USB, HID compliant
Product Finish	Installation	Freestanding with wheels
	Finish Color	White, Black, Blue and other customized color
	Materials	Aluminum profile, Sheet Metal, Glass and Plastics
Accessory	Capacitive Touch Pen	1pcs if the unit is built with capacitive touchscreen
	Remote Control	1 pcs
	AAA Battery	2 pcs
	Power Adapter	1 pcs, DC 24V 5A output
Service	1、Warranty: 1 year. 2、Complete machine technical service support.	

Dimension Drawings




Free Go Screen Monitor

Product No.	FG270	
Screen	27 inches	
Product Name	27 inches Free Go Screen	
Product Image		
LCD Panel Parameters	LCD maker	LG/BOE/CSOT/AUO
	Display Area	597.6(H) *336.15 (V) (mm)
	Aspect Ratio	16:9
	Brightness	350 nits typical
	Contrast	1200: 1
	Colors	8bits-true (16.7M)
	Backlight Type	LED backlight
	Viewing Angle	178°(V)/178°(H)
	Physical Resolution	1920*1080
	Lifetime	50000(hrs)
Mainboard	Solution	Monitor
	Languages	English, French, Germany, Italian, Spanish etc.
	VGA	DOS、VGA、SVGA、XGA、SXGA、WXGA+、WSXGA+、WUXGA
	HDMI	480i、480p、576i、576p、720p、1080i、1080P
	Menu	Support 90° rotation
	Video	support .wmv, .avi, .flv, .rm, .rmvb, .mpeg, .ts, .mp4, etc.
	Image	support .BMP, .JPEG, .PNG, .GIF, etc.
	Auto Sleep	No input signal, auto sleep
	Mouse/Keyboard	n/a
	3rd Party Applications	n/a
Screen Specs	Socket	HDMI*1, Earphone*1,USB2.0*1, VGA*1, DC 12V output*1 (power supply for customers' own media player), Touch output*1(only when built with touchscreen)
	Buttons	Home*1, Power*1
	Speaker	2*10W high quality speakers
	Power Consumption	≤45W
	Standby Consumption	≤0.5W
	Power Adapter	100-240V 50/60Hz,output DC 24V5A
	Unit Dimension	634(W)*373(H)*54(T)mm
	Package Dimension	1377(W)*633(H)*428(T)mm (including the stands)
	Net Weight	5.5Kg
	Gross Weight	8.5Kg
	Working Environment	Temperature:0℃-50℃, Humidity:10%RH-80%RH
	Storage Environment	Temperature:-20℃-60℃, Humidity:10%RH-90%RH
Stands	Adjust Height	170mm
	Rotation Angle	90° clockwise/90° counterclockwise
	Tilt Angle	22° up/22° down
	Wheels	5pcs of 1 inch universal wheel
	Net Weight of Pole	3.25Kg
	Gross Weight of Pole	5.55Kg
	Pole Package	1320*284*154mm
	Net Weight of Base	8.45Kg

	Gross Weight of Base	9.85Kg
	Base Package	504*129*504mm
	LED Indicator	Blue/Red LED, Flashing blue when charging, Solid blue when charging complete, Solid red when half capacity, Flashing red when need to charging.
Battery	Type	Lithium Iron Phosphate Battery
	Capacity	230Wh for 5 hours working
	Voltage	19.2V
	Charging Socket	DC 2.5mm
	Max Current	5A
	Dimension	220mm*170*30mm (Max)
	Weight	2.5Kg
Touchscreen (optional)	Touch Technology	G+G PCAP capacitive touch
	Touch Points	Up to 10 points
	Touch Channel	95 channels
	Scan Frequency	≥100KHz
	Touch Accuracy	±2.0mm
	Touch Sensitivity	Click ≤Φ 6mm, Slip≤Φ 6mm, Uniformly≤1.5mm
	Working Voltage	DC 5V
	Communication	USB, HID compliant
Product Finish	Installation	Freestanding with wheels
	Finish Color	White, Black, Blue and other customized color
	Materials	Aluminum profile, Sheet Metal, Glass and Plastics
Accessory	Capacitive Touch Pen	1pcs if the unit is built with capacitive touchscreen
	Remote Control	1 pcs
	AAA Battery	2 pcs
	Power Adapter	1 pcs, DC 24V 5A output
Service	1、Warranty: 1 year. 2、Complete machine technical service support.	

Dimension Drawings

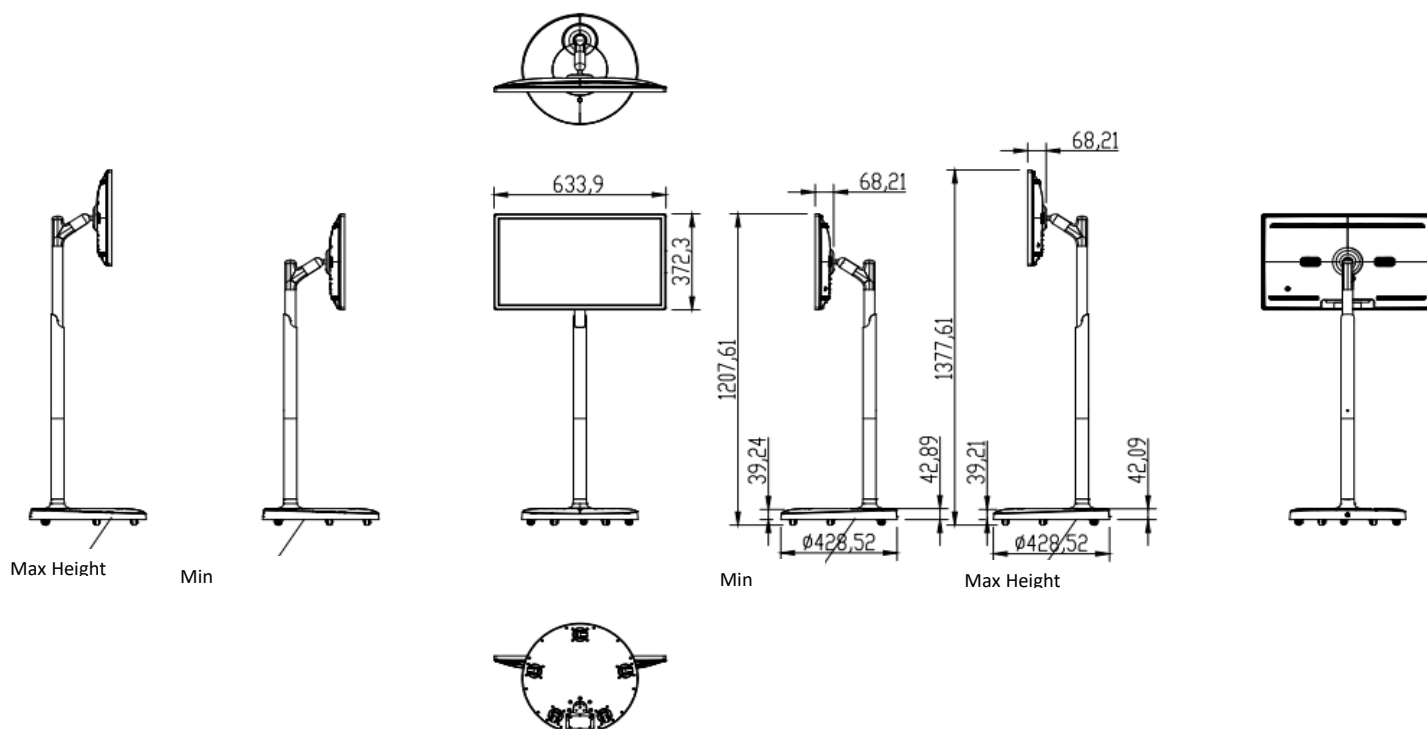

Free Go Screen Monitor

Product No.	FG320	
Screen	32 inches	
Product Name	32 inches Free Go Screen	
Product Image		
LCD Panel Parameters	LCD maker	LG/BOE/CSOT/AUO
	Display Area	698.4(H) * 392.85 (V) (mm)
	Aspect Ratio	16:9
	Brightness	350 nits typical
	Contrast	1200 :1
	Colors	8bits-true (16.7M)
	Backlight Type	LED backlight
	Viewing Angle	178°(V)/178°(H)
	Physical Resolution	1920*1080
	Lifetime	50000(hrs)
Mainboard	Solution	Monitor
	Languages	English, French, Germany, Italian, Spanish etc.
	VGA	DOS、VGA、SVGA、XGA、SXGA、WXGA+、WSXGA+、WUXGA
	HDMI	480i、480p、576i、576p、720p、1080i、1080P
	Menu	Support 90° rotation
	Video	support .wmv, .avi, .flv, .rm, .rmvb, .mpeg, .ts, .mp4, etc.
	Image	support .BMP, .JPEG, .PNG, .GIF, etc.
	Auto Sleep	No input signal, auto sleep
	Mouse/Keyboard	n/a
	3rd Party Applications	n/a
Screen Specs	Socket	HDMI*1, Earphone*1,USB2.0*1, VGA*1, DC 12V output*1 (power supply for customers' own media player), Touch output*1(only when built with touchscreen)
	Buttons	Home*1, Power*1
	Speaker	2*10W high quality speakers
	Power Consumption	≤45W
	Standby Consumption	≤0.5W
	Power Adapter	100-240V 50/60Hz,output DC 24V5A
	Unit Dimension	736(W)*430(H)*54(T)mm
	Package Dimension	1415(W)*737(H)*428(T)mm (including the stands)
	Net Weight	7.5Kg
	Gross Weight	10Kg
	Working Environment	Temperature:0℃-50℃, Humidity:10%RH-80%RH
	Storage Environment	Temperature:-20℃-60℃, Humidity:10%RH-90%RH
Stands	Adjust Height	170mm
	Rotation Angle	90° clockwise/90° counterclockwise
	Tilt Angle	22° up/22° down
	Wheels	5pcs of 1 inch universal wheel
	Net Weight of Pole	3.25Kg
	Gross Weight of Pole	5.55Kg
	Pole Package	1320*284*154mm
	Net Weight of Base	8.45Kg

	Gross Weight of Base	9.85Kg
	Base Package	504*129*504mm
	LED Indicator	Blue/Red LED, Flashing blue when charging, Solid blue when charging complete, Solid red when half capacity, Flashing red when need to charging.
Battery	Type	Lithium Iron Phosphate Battery
	Capacity	230Wh for 5 hours working
	Voltage	19.2V
	Charging Socket	DC 2.5mm
	Max Current	5A
	Dimension	220mm*170*30mm (Max)
	Weight	2.5Kg
Touchscreen (optional)	Touch Technology	G+G PCAP capacitive touch
	Touch Points	Up to 10 points
	Touch Channel	95 channels
	Scan Frequency	≥100KHz
	Touch Accuracy	±2.0mm
	Touch Sensitivity	Click ≤Φ 6mm, Slip≤Φ 6mm, Uniformly≤1.5mm
	Working Voltage	DC 5V
	Communication	USB, HID compliant
Product Finish	Installation	Freestanding with wheels
	Finish Color	White, Black, Blue and other customized color
	Materials	Aluminum profile, Sheet Metal, Glass and Plastics
Accessory	Capacitive Touch Pen	1pcs if the unit is built with capacitive touchscreen
	Remote Control	1 pcs
	AAA Battery	2 pcs
	Power Adapter	1 pcs, DC 24V 5A output
Service	1、Warranty: 1 year. 2、Complete machine technical service support.	

Dimension Drawings

